




Oxydative Oil is conventional system for exterior wood coating. It work to protect the surface from sunlight radiation, extreme weather, and micro organism. Oxydative Oil haven't long protection, and need to re-oil process for several month to re-new it and the application can only be how much the wood can be absorb.

DemiDech is specially formulated for exterior use, utilising special UV-absorbers to prevent yellowing due to UV exposure; and antifungal agents to mitigate the build up of mould on outdoor surfaces. DemiDech is designed to penetrate deep into surfaces and dry quickly: a combination of eco-friendly, biomass-derived ingredients (bio-base) gives DemiDech better carbon content and longer-lasting protection of outdoor surfaces, while remaining virtually odorless. As with all of our products, DemiDech represents the future of environmentally sound coating solutions; it is the future we at Viron strive to achieve, one step at a time.

DemiDech is available in invisible (5 unit), matte (10 unit), and satin (20-35 unit) gloss levels. The additional of Cross-Linker DD 1% give best performance, build up, and protection for **Wood Decking**.

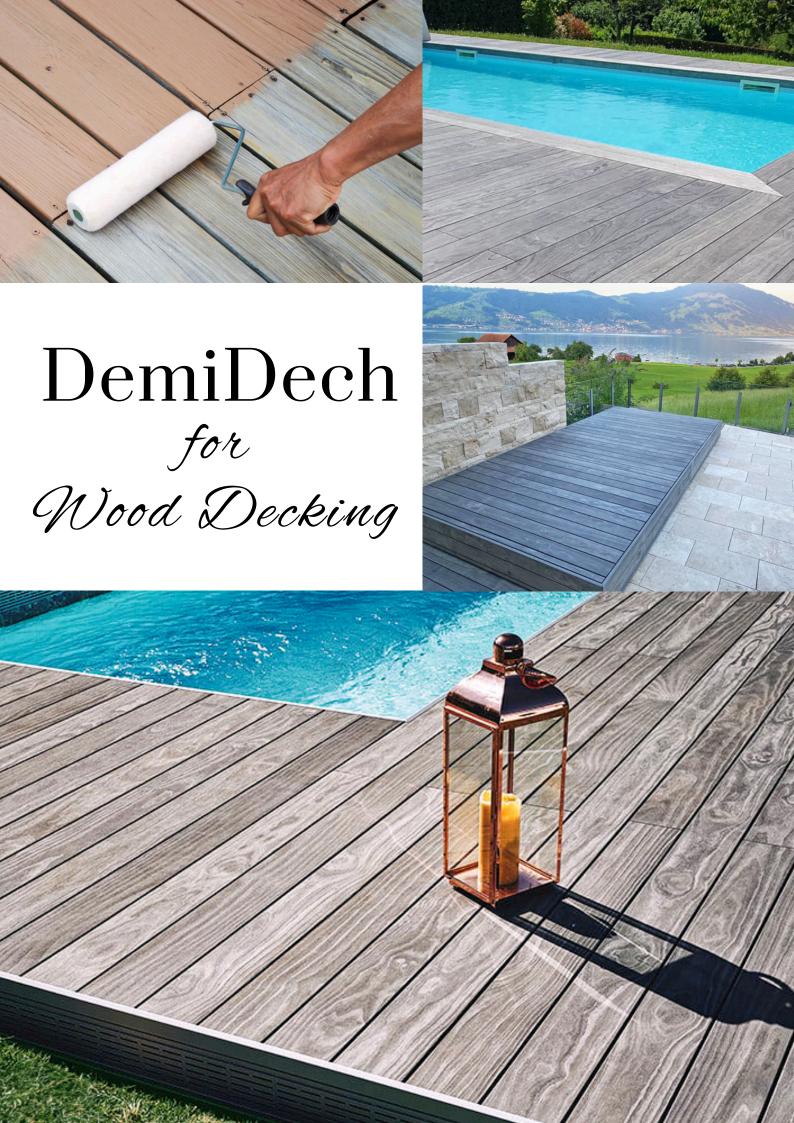

# DemiDech Aqua Exterior Oil

# Application Process

**Coating Layer Wood Decking** 



DuaProofAqua & DemiDech is available for applying using brush, hand roller, and manual spray.

- 1. Clean surface, removing dust and other particles.
- 2. One layer apply of 60 gr/m2 DuaProofAqua LS
- 3. One layer apply of 80 gr/m2
  DemiDech with Cross Linker-DD 1%



### Note:

• Spray application can add 5-10% water on DemiDech

## **MAINTENANCE**

Re-oiling 6 months after installation

## **ADVANTAGE**

- ✓ Anti-tannin
- ✓ Anti-fiber,
- Anti patches
- **S** Bio base
- ✓ No odor
- Better carbon

